


STA E62

PRODUCT DATASHEET

The **STA E62** Multipurpose Tag is a wide band **EPC GEN2 CLASS 1** label which fulfils your need for supply chain management including Identity Authentication, Event Management and Warehouse Management.

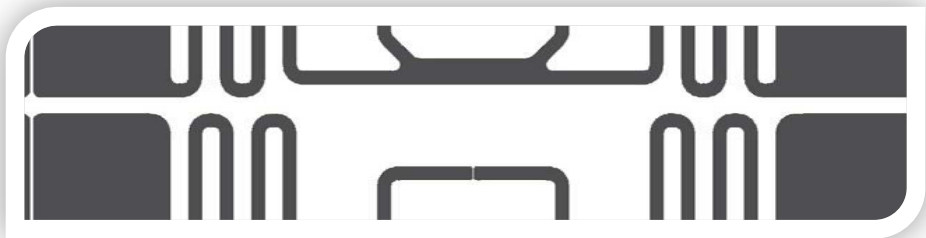

GENERAL SPECIFICATIONS

Frequency	FCC: 902-928 MHz ETSI: 865-868 MHz ASIA: 950-956 MHz
Protocol	EPC Class 1 Gen 2: ISO 18000-6C
Antenna Size	70 mm x 14 mm
Label Size	75 mm x 19 mm (Also Customizable)
Available Formats	Wet Inlays/Paper Label/Polyester Label

RFID CHIP SILICON

TAG SILICON	IMPINJ MONZA R6	IMPINJ MONZA R6-P
Protocol	EPC Class 1 Gen 2	EPC Class 1 Gen 2
Operating Frequency	860 – 960 MHz	860 – 960 MHz
EPC Memory	96 bits	128 bits
User Memory	-	32 bits
Operating temperature	-40°C / +85°C (-58°F / +185°F)	-40°C / +85°C (-58°F / +185°F)

PRODUCT CHARACTERISTICS

	ADHESIVE LABEL
Antenna Material	Aluminium/Silver Ink
Front Face Material	White TT Printable label White TT Printable Plastic
Adhesive	Solvent-free permanent acrylic adhesive
Final inspection	100% tested; defective tags marked

PRODUCT DATASHEET


DELIVERY CONDITIONS

	ADHESIVE LABEL
Packaging	Roll
Core inner diameter	76 mm
Roll outer diameter	200 mm
Unwinding direction	Labels on outside of roll
Standard roll size	5000 pcs
Minimum order quantity	One roll

APPLICATIONS

- Identity Authentication
- Event Management
- Warehouse Management

RADIATION PATTERN FOR PID-XE62

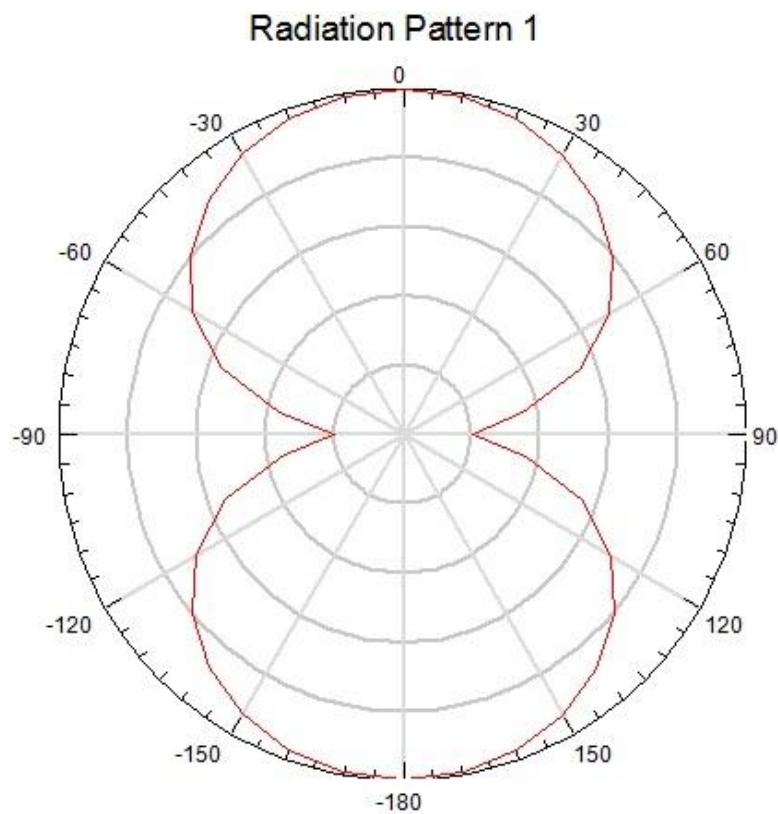

(Relative Read Range vs. Orientation)



STALLION SYSTEMS AND SOLUTIONS PVT. LTD.

Ph: 0484 2314592 Email : marketing@stallionindia.com

Branches : Mumbai | Delhi | Bangalore | Ahmedabad | Hyderabad | Chennai | Kolkatta | Kochi
Pune | Silvasa | Chandigarh | Trivandrum | Alleppey | Thrissur | Calicut | Kannur

MIDDLE EAST

STALLION SYSTEMS FZE, UAE | STALLION LABEL INDUSTRIES LLC, UAE | GLOBAL STALLION SYSTEMS WLL, QATAR | STALLION SYSTEMS LLC, OMAN



www.stallionglobal.com
An ISO 9001: 2015
Certified Company